

規格書

SPECIFICATION

品名

STYLE SWITCHING POWER SUPPLY
NAME :

型號





MODEL P1H-5AD1G
NO. :

料號

PART
NO. :

版次

REVISIO A1
N :

| | | | |
|------------------|---|--------------------|---|
| APPROVE 核准 |  | 正式 資料 用 章 |  |
| CHECK BY 審核 |  | | |
| FORM MAKER 經辦 |  | | |



新巨企業股份有限公司
ZIPPY TECHNOLOGY CORP.



Revision

| Rev. | Page | Item | Date | Description |
|------|------|------|------|-------------|
| | | | | |



MODEL NO. P1H-5AD1G

1.0 SCOPE

2.0 Input requirements

- 2.1 AC Input Voltage, Frequency and Current
- 2.2 AC Inrush Current
- 2.3 Power factor correction / Current Harmonics
- 2.4 Efficiency
- 2.5 AC Line Dropout
- 2.6 AC Line Transient Specification
- 2.7 AC Line Fast Transient Specification

3.0 Output requirements

- 3.1 Output Current / Loading
- 3.2 DC Voltage Regulation
- 3.3 Ripple and noise
- 3.4 Dynamic Loading
- 3.5 Capacitive Loading
- 3.6 Timing Requirements
- 3.7 Power Good Signal
- 3.8 Remote on / off control
- 3.9 Overshoot at Turn-on / Turn-off
- 3.10 standby Outputs

4.0 Protection

- 4.1 Over power protection
- 4.2 Over voltage protection
- 4.3 Short Circuit Protection

5.0 Environmental Requirements

- 5.1 Temperature
- 5.2 Humidity
- 5.3 Altitude

6.0 Safety

- 6.1 UL
- 6.2 CUL
- 6.3 TUV
- 6.4 CCC
- 6.5 Power Line Transient
- 6.6 RFI / EMI Standards
- 6.7 Leakage current
- 6.8 Production Line Testing
- 6.9 Hi-Pot Testing
- 6.10 Insulation resistance
- 6.11 GP



7.0 Reliability

7.1 Burn in

7.2 MTBF

8.0 Mechanical requirements



1.0 Scope

This specification defines the performance characteristics of a grounded, AC input, 1400 watts (115VAC only 1000W) , 5 output level power supply. This specification also defines world wide safety requirements and manufactures process test requirements.

2.0 Input requirements

2.1 AC Input Voltage, Frequency and Current (Rating: 100V-240Vac, 47-63Hz, 14-9.5A)

| Parameter | Minimum | Rated | Maximum | Max. Current |
|----------------|---------|------------|---------|--------------|
| Voltage (115V) | 90 Vac | 100-127Vac | 132 Vac | 14A |
| Voltage (230V) | 180 Vac | 200-240Vac | 264Vac | 9.5A |
| Frequency | 47 Hz | 50 / 60 Hz | 63 Hz | |

Table 1 – AC Input Voltage , Frequency and Current

2.2 AC Inrush Current

AC line inrush current shall not damage any component nor cause the AC line fuse to blow under any DC conditions and with any specified AC line input voltage and frequency. Repetitive On/Off cycling of the AC input voltage shall not damage the power supply.


40/60 amps @ 115/230 VAC (at 25 degrees ambient cold start for each power unit)

2.3 Power factor correction / Current Harmonics

PFC up to the target of 95% @ 115/230VAC full load , following the standard Of EN 61000-3-2.

2.4 Efficiency

The minimum power supply system efficiency shall be $\geq 86\%$, measured at nominal input voltage 115 V and full loading.

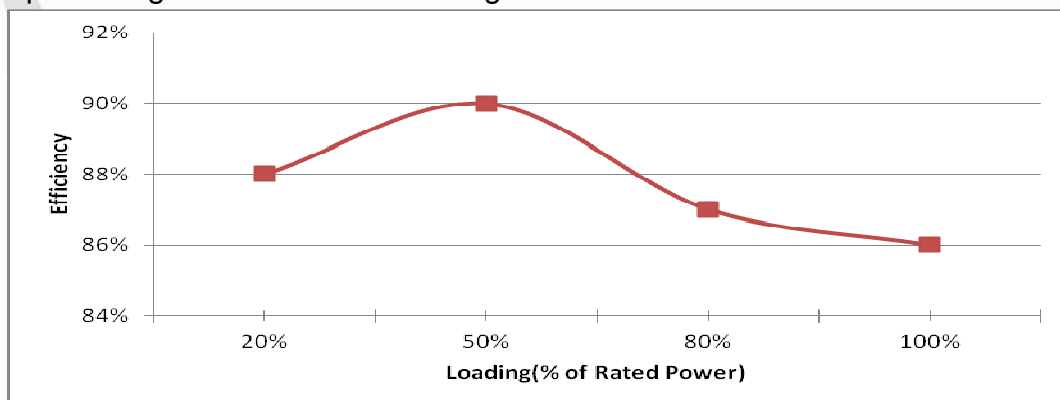

NOTE:

(The different harness conditions and/or the accuracy of measurement instruments affect the test result of output voltage and efficiency. Harness conditions are such as cable length, wire gauge, the connector types, total harness amounts.)

2.5 AC Line Dropout

An AC line dropout of 12ms or less shall not cause any tripping of control signals or protection circuits.

If the AC dropout lasts longer than 16mS the power supply should recover and meet all turn on requirements. The power supply shall meet the regulation requirement over all rated AC voltages, frequencies, and output loading conditions. Any dropout of the AC line shall not cause damage to the power supply. An AC line dropout is defined as a drop in AC line to 0VAC at any phase of the AC line for any length of time.

2.6 AC Line Transient Specification

AC line transient conditions shall be defined as “sag” and “surge” conditions.

Sag conditions (also referred to as “brownout” conditions) will be defined as the AC line voltage dropping below nominal voltage. Surge will be defined as the AC line voltage rising above nominal voltage.

2.7 AC Line Fast Transient Specification

The power supply shall meet the EN61000-4-5 directive and any additional requirements in IEC1000-4-5:1995 and the Level 3 requirements for surge-withstand capability, with the following conditions and exceptions:

- These input transients must not cause any out-of-regulation conditions, such as overshoot and undershoot, nor must it cause any nuisance trips of any of the power supply protection circuits.
- The surge-withstand test must not produce damage to the power supply.
- The supply must meet surge-withstand test conditions under maximum and minimum DC-output load conditions.

3.0 Output requirements

3.1 Output Current / Loading

The Table 2 define current rating. The power supply shall meet both static and dynamic voltage regulation requirements for minimum load condition.

| Output | +5V | +3.3V | +12V | -12V | +5VSB |
|---------------|------------|--------------|-------------|-------------|--------------|
| Max. Load | 36A | 25A | 115A | 0.5A | 3.0 A |
| Min. Load | 0A | 0A | 0A | 0A | 0A |

Table 2 – Output Current:

- (1) +5V and +3.3V total output max : 205W
- (2) Total power :1400W (MAX) @200VAC~240VAC
1000W (MAX) @100VAC~127VAC

3.2 DC Voltage Regulation

The power supply output voltages must stay within the following voltage limits when operating at steady state and dynamic loading conditions. All outputs are measured with reference to the return remote sense (ReturnS) signal. The +5V, +12V, -12V and +5VSB outputs are measure at the power supply connectors' references to ReturnS. The +5V and +3.3V is measured at its remote sense signal (+5VS+, +3.3VS+) located at the signal connector.

| Output Voltage | +5V | +3.3V | +12V | -12V | +5VSB |
|----------------|--------|--------|--------|----------|--------|
| Load Reg. | +5/-5% | +5/-5% | +5/-5% | +10/-10% | +5/-5% |
| Line Reg. | ±1% | ±1% | ±1% | ±1% | ±1% |

Table 3 – Regulation

3.3 Ripple and noise

The maximum allowed ripple/noise output of the power supply is defined in Table 4. This is measured over a bandwidth of 0 Hz to 20 MHz at the power supply output connectors. A 10µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor are placed at the point of measurement.

| Output Volatage | Ripple | Ripple+Noise |
|-----------------|------------|--------------|
| +5V | 50mV(P-P) | 50mV(P-P) |
| +12V | 120mV(P-P) | 120mV(P-P) |
| -12V | 120mV(P-P) | 120mV(P-P) |
| +3.3V | 50mV(P-P) | 50mV(P-P) |
| +5Vsb | 50mV(P-P) | 50mV(P-P) |

Table 4:Ripple and noise

3.4 Dynamic Loading

The output voltages shall remain within the limits specified in Table 5 for the step loading and within the limits specified in Table 6 for the capacitive loading. The load transient repetition rate shall be tested between 50Hz and 5kHz at duty cycle ranging from 10%-90%. The load transient repetition rate is only a test specification. The Δ step load may occur anywhere within the MIN load to the MAX load range.

| Output | Δ Step Load Size | Load Slew Rate | Capacitive Load |
|--------|-------------------------|----------------|-----------------|
| +3.3 V | 30% of max load | 0.5 A/µs | 1000 µF |
| +5 V | 30% of max load | 0.5 A/µs | 1000 µF |
| +12V | 65% of max load | 0.5 A/µs | 2200 µF |
| +5 VSB | 25% of max load | 0.5 A/µs | 1 µF |

Table 5: Transient Load Requirements

Note: For dynamic voltage regulation requirements +12V min Loading is 1A.

3.5 Capacitive Loading

The power supply shall be stable and meet all requirements with the following capacitive loading ranges.

| Output | MIN | MAX | Units |
|--------|-----|--------|---------|
| +3.3 V | 10 | 12,000 | μ F |
| +5 V | 10 | 12,000 | μ F |
| +12 V | 10 | 11,000 | μ F |
| -12 V | 1 | 350 | μ F |
| +5 VSB | 1 | 350 | μ F |

Table 6: Capacitive Loading Conditions

3.6 Timing Requirements

These are the timing requirements for the power assembly operation. The output voltages must rise from 10% to within regulation limits (T_{vout_rise}) within 0 to 20mS. The +5V, +3.3V and +12V output voltages should start to rise at about the same time. All outputs must rise monotonically. The +5V output needs to be greater than the +3.3V output during any point of the voltage rise. The +5V output must never be greater than the +3.3V output by more than 2.25V. Each output voltage shall reach regulation within 50 ms (T_{vout_on}) of each other during turn on of the power supply. Each output voltage shall fall out of regulation within 400 ms (T_{vout_off}) of each other during turn off. Figure 1 and figure 2 show the turn On and turn Off timing requirement. In Figure 2, the timing is shown with both AC and PSON# controlling the On/Off of the power supply.

EMACS

| Item | Description | MIN | MAX | Units |
|------------|--|-----|-----|-------|
| Tvout_rise | Output voltage rise time from each main output. | | 20 | ms |
| Tsb_rise | Ouput voltage rise time for the 5VSB output. | | 25 | ms |
| Tvout_on | All main outputs must be within regulation of each other within this time. | | 50 | ms |
| Tvout_off | All main outputs must leave regulation within this time. | | 400 | ms |

Table 7: Output Voltage Timing

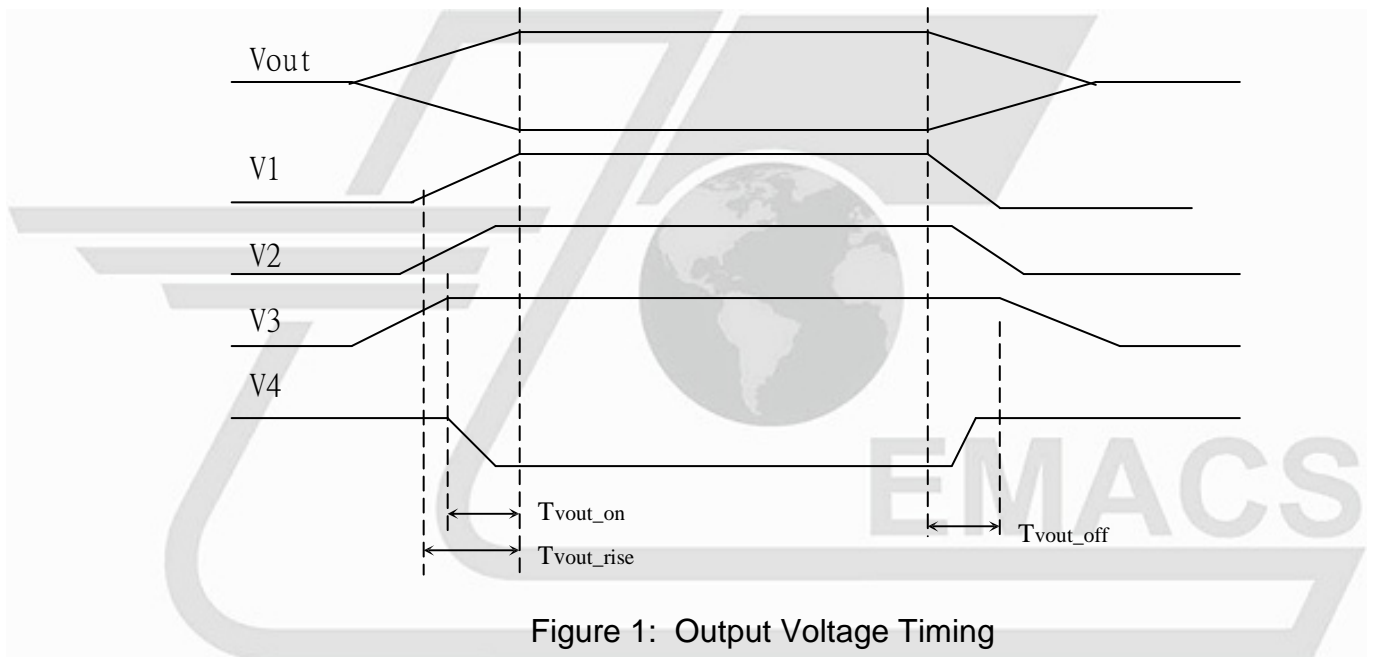


Figure 1: Output Voltage Timing

| Item | Description | MIN | MAX | UNITS |
|----------------|--|-----|------|-------|
| Tsb_on_delay | Delay from AC being applied to 5VSB being within regulation. | | 1500 | ms |
| Tac_on_delay | Delay from AC being applied to all output voltages being within regulation. | | 2500 | ms |
| Tvout_holdup | Time all output voltages stay within regulation after loss of AC. Tested at 80% of maximum load and over 110VAC input . | 16 | | ms |
| Twok_holdup | Delay from loss of AC to deassertion of PWOK. Tested at 80% of maximum load and over 110VAC input . | 15 | | ms |
| Tpson_on_delay | Delay from PSON# active to output voltages within regulation limits. | 5 | 400 | ms |
| Tpson_pwok | Delay from PSON# deactive to PWOK being deasserted. | | 50 | ms |
| Twok_on | Delay from output voltages within regulation limits to PWOK asserted at turn on. | 100 | 500 | ms |
| Twok_off | Delay from PWOK deasserted to output voltages (3.3V, 5V, 12V, -12V) dropping out of regulation limits. Tested at 80% of maximum load and over 110VAC input . | 1 | | ms |
| Tsb_vout | Delay from 5VSB being in regulation to O/Ps being in regulation at AC turn on. | 5 | 1000 | ms |
| Tsb_holdup | Time 5VSB output voltage stays within regulation after loss of AC. | 70 | | ms |
| Tvout_rise | Output voltage rise time from each main output. | | 20 | ms |

Table 8: Turn On/Off Timing

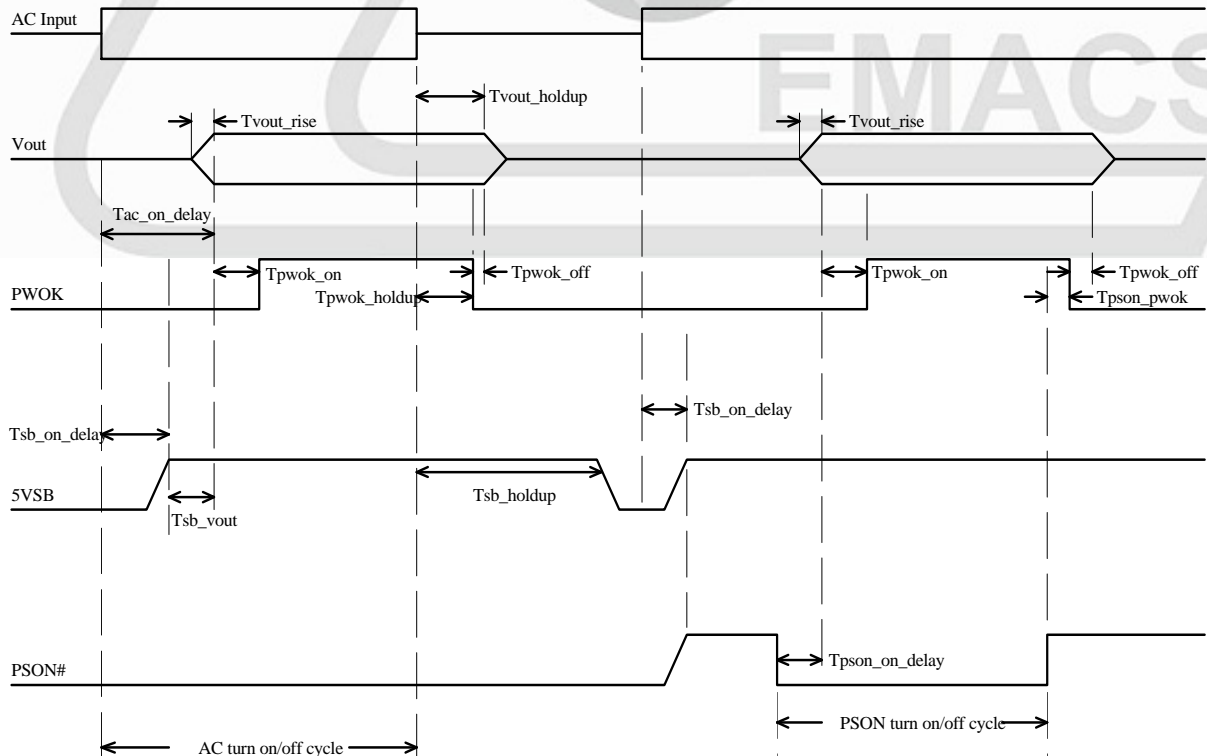


Figure 2: Turn On/Off Timing(Single Power Supply)

3.8 Remote on/off control

The PSON# signal is required to remotely turn on/off the power supply. PSON# is an active low signal that turns on the +5V, +3.3V, +12V and -12V power rails. When this signal is not pulled low by the system, or left open, the outputs (except the +5VSB) turn off. This signal is pulled to a standby voltage by a pull-up resistor internal to the power supply. Refer to Figure 2 for timing diagram.

| | | |
|--|--|------------|
| Signal Type | Accepts an open collector/drain input from the system. Pull-up to VSB located in power supply. | |
| PSON[#] = Low | ON | |
| PSON[#] = Open or High | OFF | |
| | MIN | MAX |
| Logic level low (power supply ON) | 0 V | 1.0 V |
| Logic level high (power supply OFF) | 2.0 V | 5.25 V |
| Source current, Vpson = low | | 4 mA |
| Power up delay: T_{pson_on_delay} | 5 ms | 400 ms |
| PWOK delay: T_{pson_pwok} | | 50 ms |

Table 9: PSON[#] Signal Characteristic

3.9 Overshoot at Turn-on / Turn-off

Any output overshoot at turn on shall be less than 10% of the nominal output value. Any overshoot shall recover to within regulation in less than 10ms.

3.10 standby outputs

The 5VSB output shall be present when an AC input greater than the power supply turn on voltage is applied.

4.0 Protection

Protection circuits inside the power supply shall cause only the power supply's main outputs to shutdown. If the power supply latches off due to a protection circuit tripping, either a AC cycle OFF for 15 sec, or PSON# cycle HIGH for 1 sec must be able to restart the power supply.

4.1 Over power protection

The power supply shall provide over power protection on the power supply latches all DC output into a shutdown state. Over power of this type shall cause no damage to power supply, after over load is removed and a power on/off cycle is initiated, the power supply will restart.

Trigger point total power min. 110%, max. 170%.

4.2 Over voltage protection

The power supply shall shut down in a latch off mode when the output voltage exceeds the over voltage limit shown in Table 10.

| Voltage | Minimum | Maximum | Shutdown Mode |
|---------|---------|---------|---------------|
| +5V | +5.7V | +6.5V | Latch Off |
| +3.3V | +3.7V | +4.3V | Latch Off |
| +12V | +13.2V | +15V | Latch Off |

Table 10-Over Voltage Protection

4.3 Over current protection

This power supply shall have current limit to prevent the +5V, +3.3V, and +12V outputs from exceeding the values shown in Table 11. The current limit shall not trip under maximum continuous load or peak loading as described in Table 5. The power supply shall latch off if the current exceeds the limit. The latch shall be cleared by toggling the PSON# signal or by cycling the AC power. The power supply shall not be damaged from repeated power cycling in this condition. The -12V and +5VSB outputs shall be shorted circuit protected so that no damage can occur to the power supply.

| Voltage | Minimum | Maximum | Shutdown Mode |
|---------|---------|---------|---------------|
| +5V | 110% | 165% | Latch Off |
| +3.3V | 110% | 165% | Latch Off |
| +12V | 110% | 165% | Latch Off |

Table 11 – Over Current Protection

4.4 Short Circuit Protection

4.4.1: A short circuit placed on any DC output to DC return shall cause no damage.

4.4.2: The power supply shall be latched in case any short circuit is taken place at +5V,+3.3V,+12V ,-12V output.

4.4.3: The power supply shall be auto-recovered in case any short circuit is taken place at +5VSB.

5.0 Environmental Requirements

5.1 Temperature

| | |
|----------------------------------|--------------|
| Operating Temperature Range: | 0°C ~ 50°C |
| Non-Operating Temperature Range: | -20°C ~ 80°C |

5.2 Humidity

| | |
|-------------------------------|----------------------------|
| Operating Humidity Range: | 20% ~ 80%RH non-condensing |
| Non-Operating Humidity Range: | 10% ~ 90%RH non-condensing |

5.3 Altitude

| | |
|-------------------------------|------------------------|
| Operating Altitude Range: | Sea level to 16,000 ft |
| Non-Operating Altitude Range: | Sea level to 40,000 ft |

6.0 Safety

The power supply must be certified to the safety standard listed following:

6.1 Underwriters laboratory (UL).

The power supply designed to meet UL 62368.

6.2 Canadian standards association (CUL)

The power supply designed to meet CSA C22.2 No. 62368.

6.3 TUV

The power supply shall be designed to meet TUV EN-62368.

6.4 CCC Standards

The power supply shall be designed to meet GB/T9254-2008, GB4943.1-2011, GB17625.1-2012.

6.5 Power Line Transient.

The power supply shall be designed to meet the following standards

- a.) EN 61000-4-2(ESD) Criterion A, $\pm 8KV$ by contact, $\pm 15KV$ by air.
- b.) EN 61000-4-4(EFT) Criterion A, $\pm 1KV$.
- c.) EN 61000-4-5(SURGE) Criterion A, Line-Line $\pm 1KV$
Line-Earth $\pm 2KV$.

6.6 RFI / EMI Standards

The power supply shall comply with the following radiated and conducted Emissions standards,

- a.) FCC part 15. class A.
- b.) CISPR 22 (EN 55032). class A.

6.7 Leakage current

Input leakage current from line to ground will be less than 3.5mA rms. Measurement will be made at 240 VAC and 60Hz.

6.8 Production Line Testing

100% of the power supply production must have the following test performed. Each power shall be marked indicating the testing was done and passed. Typically this is done by stamping or labeling the power supply with "Hi-pot test OK".

6.9 Hi-Pot Testing

| | |
|------------------------|------------------------|
| Primary to secondary | : 3000 VAC for 60 sec. |
| Primary to FG | : 1500 VAC for 60 sec. |
| For production purpose | : |
| Primary to FG | : 1500 VAC for 1 sec. |

6.10 Insulation resistance

Primary to secondary : 20 meg. Ohm min. 500 VDC
Primary to FG : 20 meg. Ohm min. 500VDC

6.11 GP

The components and used materials shall be in compliance with RoHS European Directive.

7.0 Reliability

7.1 Burn in

All products shipped to customer must be burn in. The burn in shall be performed at high line voltage.

7.2 MTBF

The MTBF of the power supply shall be calculated utilizing the Part-Count Analysis method of MIL-HDBK-217F.

The calculated MTBF of the power supply is 147,000 hours at ambient temperature 25 degree.anical requirements

8.0 Mechanical requirements

Physical dimension : 225mm (D) x 100mm (W) x 40.5mm (H)



EMACS