AC TO DC OPEN FRAME POWER SUPPLY

SSF-0601 SERIES

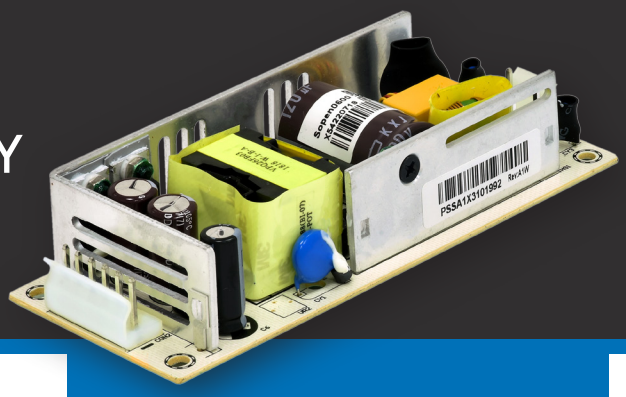

FEATURES:

- ✓ Universal AC input / Full range
- ✓ Built in Class B EMI filter
- ✓ Short circuit protection
- ✓ Over voltage protection
- ✓ Over power protection
- ✓ Highly reliable Japanese 105 °C aluminum electrolytic capacitors
- ✓ Average efficiency: ≥ 87 %
- ✓ No load power consumption ≤ 0.3 W
- ✓ Fully regulated output
- ✓ Working temperature: 0 °C – 50 °C

Model name	Total Power (W)	O/P Voltage (V)	O/P Current (A)	Efficiency (%)
SSF-0601-12	60	12	5	87 %

APPLICATIONS:

- Network switches (fast Ethernet switch, PoE switch)
- Computer data storage (internal storage, external storage, NAS storage)
- POS systems
- Automated teller machines

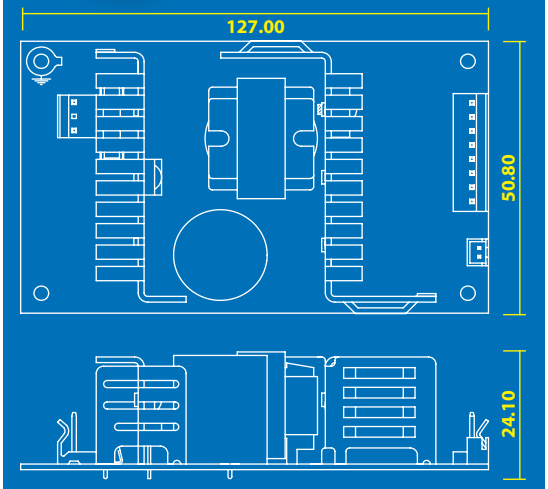

Dimensions:
127 mm (L) x 50.8 mm (W) x 24.1 mm (H)

Safety:

CB	cUL	CCC
✓	✓	–

cTUVus	TUV	BSMI
–	✓	–

EMI/EMC:

CE	FCC	RCM
✓	✓	–

ISO:9001:2015 ISO:14001:2015

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE.