

規格書


SPECIFICATION

品名
STYLE NAME : SWITCHING POWER SUPPLY

型號
MODEL NO. : DZRP-2600V2

料號
PART NO. :

版次
REVISION : A4

APPROVE 核准	黃永欣	正式 資料 用 章	
CHECK BY 審核	何忠祥		
FORM MAKER 經辦	吳欣宜		



新巨企業股份有限公司
ZIPPY TECHNOLOGY CORP.

10F, No.50, MINQUAN RD., XINDIAN DIST., NEW TAIPEI CITY 231, TAIWAN
TEL. : +886(2)29188512 FAX. : +886(2)29134969
<http://www.zippy.com.tw> E-MAIL: powersales@zippy.com.tw



Revision

Rev.	Page	Item	Date	Description
A2	8 9	3.6 5.1	JUN-14-2018	Update Timing Requirements Add Temperature limit shown in Table 10
A3	4	2.3	JAN-23-2019	Revise Steady-state current 25/10A to 25/12A
A4	10 12	4.2 6.2	JUN-25-2019	Modify OVP Min 12.4V Hi-pot Primary to FG 1800VAC/1Sec



MODEL NO. DZRP-2600V2

1.0 SCOPE

2.0 Input requirements

- 2.1 DC Input Voltage and Current
- 2.2 DC Inrush Current
- 2.3 Steady-state current
- 2.4 Start up Current
- 2.5 Efficiency

3.0 Output requirements

- 3.1 Output Current / Loading
- 3.2 DC Voltage Regulation
- 3.3 Ripple and noise
- 3.4 Dynamic Loading
- 3.5 Capacitive Loading
- 3.6 Timing Requirements
- 3.7 Remote on / off control
- 3.8 Overshoot at Turn-on / Turn-off
- 3.9 standby Outputs

4.0 Protection

- 4.1 Over power protection
- 4.2 Over voltage protection
- 4.3 Short Circuit Protection

5.0 Environmental Requirements

- 5.1 Temperature
- 5.2 Humidity
- 5.3 Altitude

6.0 Safety

- 6.1 UL
- 6.2 CUL
- 6.3 TUV
- 6.4 CCC
- 6.5 Power Line Transient
- 6.6 RFI / EMI Standards
- 6.7 Production Line Testing
- 6.8 Hi-Pot Testing
- 6.9 Insulation resistance

7.0 Reliability

- 7.1 Burn in
- 7.2 MTBF

8.0 Mechanical requirements

9.0 Instruction of DC source input cable connection

1.0 Scope

This specification defines the performance characteristics of a grounded, Dc input, 600 watts, 2 output level power supply. This specification also defines world wide safety requirements and manufactures process test requirements.

2.0 Input requirements

2.1 DC Input Voltage, (Rating: -36~-72Vdc, Normal: -48Vdc)

2.2 DC Inrush Current

25 amps max. @ -48VDC Input

(at 25 degrees ambient cold start for each power unit)

High-Frequency peak amplitudes lasting less than 50uS
(i.e.those caused by EMI capacitors)shall be ignored.

2.3 Steady-state current

25 / 12 amps maximum at any low/high range input voltage.

2.4 Start up Current

30 amps max. @ -48VDC Input (at 25 degrees ambient cold start)

2.5 Efficiency

The maximum power supply system efficiency shall be 85%, measured at nominal input voltage -48Vdc

NOTE:

The different harness conditions and/or the accuracy of measurement instruments affect the test result of output voltage and efficiency.

Harness conditions are such as cable length, wire gauge, the connector types, total harness amounts.

3.0 Output requirements

3.1 Output Current / Loading

The Table 1 define current rating. The power supply shall meet both static and dynamic voltage regulation requirements for minimum load condition.

Output Voltage	+12V	+12VSB
Max. Load	50A	2.0 A
Min. Load	0A	0A

**Table 1 – Output Current:
Total power:600W (MAX)**

3.2 DC Voltage Regulation

The power supply output voltages must stay within the following voltage limits when operating at steady state and dynamic loading conditions. All outputs are measured with reference to the return remote sense (ReturnS) signal. The +12V and +12VSB outputs are measure at the power supply connectors' references to ReturnS.

Output Voltage	+12V	+12VSB
Load Reg.	+5/-5%	+5/-5%
Line Reg.	±1%	±1%

Table 2 – Regulation

3.3 Ripple and noise

The maximum allowed ripple/noise output of the power supply is defined in Table 3. This is measured over a bandwidth of 0 Hz to 20 MHz at the power supply output connectors. A 100µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor are placed at the point of measurement.

Output Volatage	Ripple	Ripple+Noise
+12V	120mV(P-P)	120mV(P-P)
+12Vsb	120mV(P-P)	120mV(P-P)

Table 3:Ripple and noise

3.4 Dynamic Loading

The output voltages shall remain within the limits specified in Table 4 for the step loading and within the limits specified in Table 5 for the capacitive loading. The load transient repetition rate shall be tested between 50Hz and 5kHz at duty cycle ranging from 10%-90%. The load transient repetition rate is only a test specification. The Δ step load may occur anywhere within the MIN load to the MAX load range.

Output	Δ Step Load Size	Load Slew Rate	Capacitive Load
12V	65% of max load	0.5 A/ μ s	2200 μ F
+12VSB	25% of max load	0.5 A/ μ s	1 μ F

Note: For dynamic voltage regulation requirements +12V min Loading is 1A

Table 4: Transient Load Requirements

3.5 Capacitive Loading

The power supply shall be stable and meet all requirements with the following capacitive loading ranges.

Output	MIN	MAX	Units
+12 V	10	11,000	μF
+12 VSB	1	350	μF

Table 5: Capacitive Loading Conditions

3.6 Timing Requirements

These are the timing requirements for the power assembly operation. The output voltages must rise from 10% to within regulation limits (T_{vout_rise}) within 5 to 70mS. The +12V output voltages should start to rise at about the same time. All outputs must rise monotonically. Each output voltage shall reach regulation within 50 ms (T_{vout_on}) of each other during turn on of the power supply. Each output voltage shall fall out of regulation within 400 ms (T_{vout_off}) of each other during turn off. Figure 1 and figure 2 show the turn On and turn Off timing requirement. In Figure 2, the timing is shown with both DC and PSON# controlling the On/Off of the power supply..

Item	Description	MIN	MAX	Units
T_{vout_rise}	Output voltage rise time from each main output.		20	ms
T_{sb_rise}	Ouput voltage rise time for the 5VSB output.		25	
T_{vout_on}	All main outputs must be within regulation of each other within this time.		50	ms
T_{vout_off}	All main outputs must leave regulation within this time.		400	ms

Table 6 – Output Voltage Timing

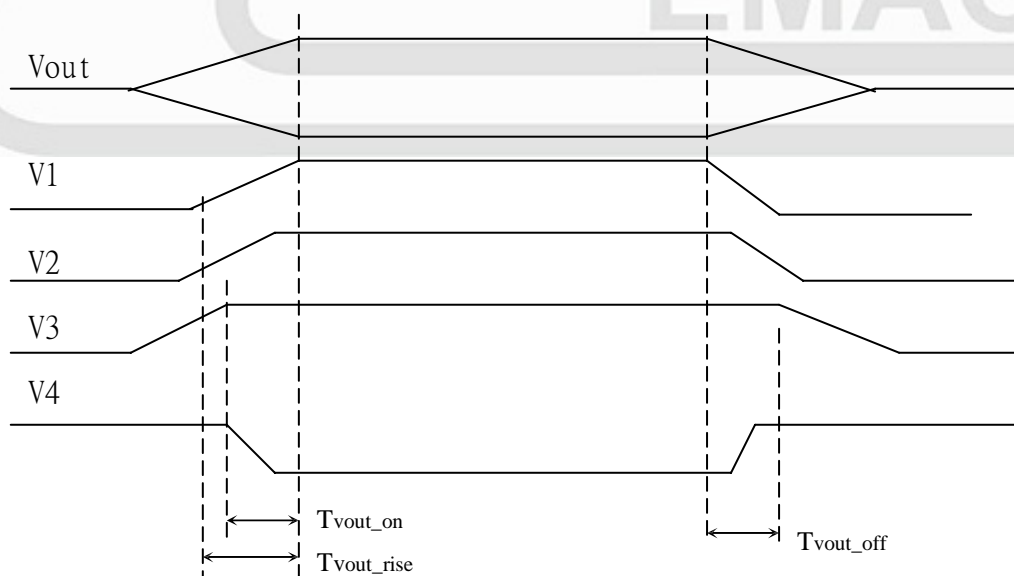


Figure 1: Output Voltage Timing

Item	Description	MIN	MAX	UNITS
Tsb_on_delay	Delay from DC being applied to 5VSB being within regulation.		4000	ms
Tdc_on_delay	Delay from DC being applied to all output voltages being within regulation.		5000	ms
Tsb_vout	Delay from 5VSB being in regulation to O/Ps being in regulation at DC turn on.	5	1000	ms
Tpwok_on	Delay from output voltages within regulation limits to PWOK asserted at turn on.	100	500	ms
Tvout_holdup	Time all output voltages stay within regulation after loss of DC.	1.0		ms
Tpwok_holdup	Delay from loss of DC to deassertion of PWOK.	0.6		ms
Tsb_holdup	Time 5VSB output voltage stays within regulation after loss of DC.	2		ms
Tpson_on_delay	Delay from PSON# active to output voltages within regulation limits.	5	400	ms
Tpson_pwok	Delay from PSON# deactive to PWOK being deasserted.		50	ms

Table 7: Turn On/Off Timing

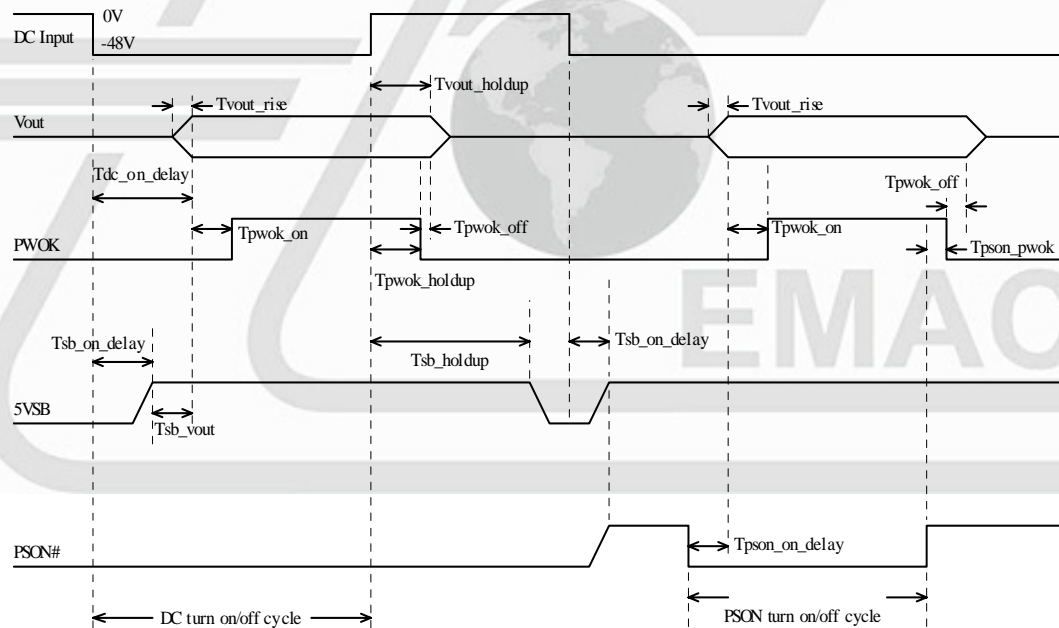


Figure 2: Turn On/Off Timing(Single Power Supply)

3.7 Remote on/off control

The PSON# signal is required to remotely turn on/off the power supply. PSON# is an active low signal that turns on the +12V power rails. When this signal is not pulled low by the system, or left open, the outputs (except the +12VSB) turn off. This signal is pulled to a standby voltage by a pull-up resistor internal to the power supply. Refer to Figure 2 for timing diagram

Signal Type	Accepts an open collector/drain input from the system. Pull-up to VSB located in power supply.	
PSON# = Low	ON	
PSON# = Open or High	OFF	
	MIN	MAX
Logic level low (power supply ON)	0 V	1.0 V
Logic level high (power supply OFF)	2.0 V	5.25 V
Source current, Vpson = low		4 mA
Power up delay: Tpson_on_delay	5 ms	400 ms
PWOK delay: T pson_pwok		60 ms

Table 8: PSON# Signal Characteristic

3.8 Overshoot at Turn-on / Turn-off

Any output overshoot at turn on shall be less than 10% of the nominal output value.

Any overshoot shall recover to within regulation in less than 10ms.

3.9 standby outputs

The 5VSB output shall be present when an DC input greater than the power supply turn on voltage is applied.

4.0 Protection

Protection circuits inside the power supply shall cause only the power supply's main outputs to shutdown. If the power supply latches off due to a protection circuit tripping, either a DC OFF for 15 sec, or PSON# cycle HIGH for 1 sec must be able to restart the power supply.

4.1 Over power protection(Per power module)

The power supply shall provide over power protection on the power supply latches all DC output into a shutdown state. Over power of this type shall cause no damage to power supply, after over load is removed and a power on/off cycle is initiated, the power supply will restart.

Trigger point total power min. 110%, max. 165%.

4.2 Over voltage protection

The power supply shall shut down in a latch off mode when the output voltage exceeds the over voltage limit shown in Table 9.

Voltage	Minimum	Maximum	Shutdown Mode
+12V	+12.4V	+15V	Latch Off

Table 9-Over Voltage Protection

4.3 Short Circuit Protecton

4.3.1: A short circuit placed on any DC output to DC return shall cause no damage.

4.3.2. The power supply shall be latched in case the DC return circuit is short circuitwith +5V;+3.3V;+12V output.

4.3.3 The power supply shall be auto-recovered in case the DC return circuit is short circuit with +5VSB.

5.0 Environmental Requirements

5.1 Temperature

Operating Temperature Range:	0°C ~ 50°C
Non-Operating Temperature Range:	-20°C ~ 80°C

*. Temperature limit shown in Table 10.

Total max.
output Power

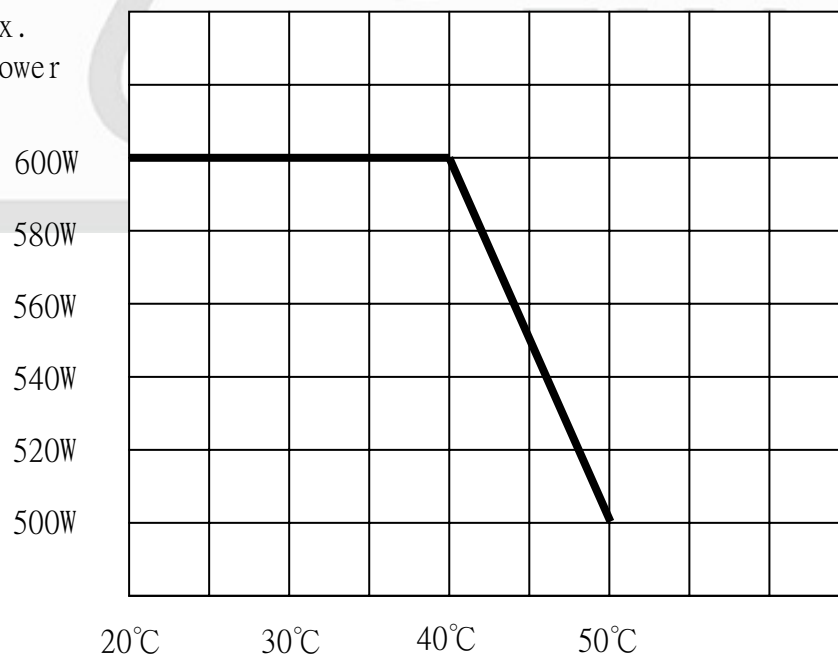


Table 10 – TEMPERATURE LIMIT

5.2 Humidity

Operating Humidity Range:	20% ~ 80%RH non-condensing
Non-Operating Humidity Range:	10% ~ 90%RH non-condensing

5.3 Altitude

Operating Altitude Range:	Sea level to 10,000 ft
Non-Operating Altitude Range:	Sea level to 40,000 ft

6.0 Safety

The power supply must be certified to the safety standard listed following:

6.1 Underwriters laboratory (UL).

The power supply designed to meet UL 60950 & UL 62368-1.

6.2 Canadian standards association (CUL)

The power supply designed to meet CSA C22.2 No. 60950 & No. 62368-1.

6.3 TUV

The power supply shall be designed to meet TUV EN-60950 & EN-62368-1.

6.4 CCC Standards

The power supply shall be designed to meet GB/9254-2008, GB4943.1-2011, GB17625.1-2012.

6.5 Power Line Transient.

The power supply shall be designed to meet the following standards

- a.) EN 61000-4-2(ESD) Criterion B, $\pm 4KV$ by contact, $\pm 8KV$ by air.
- b.) EN 61000-4-4(EFT) Criterion B, $\pm 1KV$.
- b.) EN 61000-4-5(SURGE) Criterion B, Line-Line $\pm 1KV$
Line-Earth $\pm 2KV$.

6.6 RFI / EMI Standards

The power supply shall comply with the following radiated and conducted Emissions standards,

- a.) FCC part 15. class A.
- b.) CISPR 22 (EN 55032). class A.

6.7 Production Line Testing

100% of the power supply production must have the following test performed. Each power shall be marked indicating the testing was done and passed. Typically this is done by stamping or labeling the power supply with "Hi-pot test OK".

6.8 Hi-Pot Testing

Primary to secondary	: 2000 VAC for 60 sec.
Primary to FG	: 1500 VAC for 60 sec.
For production purpose	:
Primary to FG	: 1800 VAC for 1 sec.

6.9 Insulation resistance

Primary to secondary	: 20 meg. Ohm min. 500 VDC
Primary to FG	: 20 meg. Ohm min. 500VDC

7.0 Reliability

7.1 Burn in

All products shipped to customer must be burn in. The burn in shall be performed at high line voltage.

7.2 MTBF

The MTBF of the power supply shall be calculated utilizing the Part-Count Analysis method of MIL-HDBK-217F.

The calculated MTBF of the power supply is 196328 hours at ambient temperature 25 degree.anical requirements

8.0 Mechanical requirements

Physical dimension : 185mm (D) x 73.5mm (W) x 40mm (H)

9.0 Instruction of DC source input cable connection

DC SOURCE

POWER SUPPLY

