

| | | | |
|---|---|--|---------------------|
|  SWITCHING POWER SUPPLY | PRODUCT SPECIFICATION | | File: SSP-750RS-A10 |
| | Model: SSP-750RS Full Range Rev.:A10 | | Date: Jan, 25, 2019 |
| | | | Page: 1 of 7 |

1.0 INPUT:

1.1 VOLTAGE

| | MINIMUM | MAXIMUM | UNITS |
|-------------|---------|---------|-------|
| INPUT RANGE | 90 | 264 | Vrms |
| RATED RANGE | 100 | 240 | Vrms |

1.2 FREQUENCY

47Hz ~ 63Hz

1.3 CURRENT

10A/100V, 5A/240V

1.4 INRUSH CURRENT

115V/65A(max.), 230V/130A(max.) at 25°C (cold start)

1.5 POWER EFFICIENCY

At 20%/50%/100% load AC 115V 60Hz and AC 230V 50Hz, the power efficiency should be at least 87%/90%/87%.

1.6 STANDBY MODE

During measurement of the "STANDBY MODE" condition, the main converter is off (PS_ON=High). +5Vsb converter is working and standby input power is measured.

| Load Condition | Efficiiiency | Power in |
|------------------------------|--------------|----------|
| <45mA | ---- | <0.45W |
| 45mA | >=50% | ---- |
| 100mA | >=55% | |
| 250mA | >=65% | ---- |
| 1.0A | >=75% | ---- |
| *2013 ErP Standby efficiency | | |

1.7 ACTIVE POWER FACTOR CORRECTION (PFC):

PFC at half/full load:

>0.95 at AC 110v 60Hz(typical)

>0.90 at AC 230v 50Hz(typical)

| | | | | | |
|---|---|--|--|--|---------------------|
|  SWITCHING POWER SUPPLY | PRODUCT SPECIFICATION | | | | File: SSP-750RS-A10 |
| | Model: SSP-750RS Full Range Rev.:A10 | | | | Date: Jan, 25, 2019 |
| | | | | | Page: 2 of 7 |

2.0 OUTPUT:

| GROUP | 1 | | | | 2 |
|-----------------------|-------|-------|-------|------|-------|
| VOLTAGE | +3.3V | +5V | +12V | -12V | +5VSB |
| MAX.LOAD | 20A | 35A | 62A | 0.3A | 3.0A |
| MIN.LOAD | 0A | 0A | 0A | 0A | 0A |
| VOLTAGE REGULATION | ±5% | ±5% | ±5% | ±10% | ±5% |
| RIPPLE & NOISE (mV) | 50 | 50 | 120 | 120 | 50 |
| Capacitive Loads_(uF) | 10000 | 10000 | 20000 | 330 | 10000 |

NOTE:

- 1.The continuous maximum total output power shall not exceed 750W.
+12V DC maximum output power shall not exceed 62A(744W).
+3.3V and +5V DC maximum combined output power shall not exceed 200W.
- 2.Maximum peak total DC output power should not exceed 825W.
- 3.Peak power and current loading should be supported for a minimum of 1 second.
- 4.+3.3V, +5V and +12V DC output voltage should be within Figure 1 cross loading range to meet regulation.
- 5.Load regulation measuring the output voltage difference between 80plus 20% and 100% load.
- 6.Ripple and Noise measuring with an oscilloscope with 20 MHz bandwidth in Figure 1 cross loading range. Output should be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system load. The length of ground wire on probe should not longer than 40mm, if a Non - differential type of scope was used.

2.1 CROSS REGULATION

The +5V & +3.3V combined load and +12VDC load shall remain within the defined in section 2.0 over cross load combinations shown Figure 1:

| | | | |
|---|------------------------------|--|---------------------|
|  SWITCHING POWER SUPPLY | PRODUCT SPECIFICATION | | File: SSP-750RS-A10 |
| | Model: SSP-750RS | | Date: Jan, 25, 2019 |
| | Full Range Rev.:A10 | | Page: 3 of 7 |

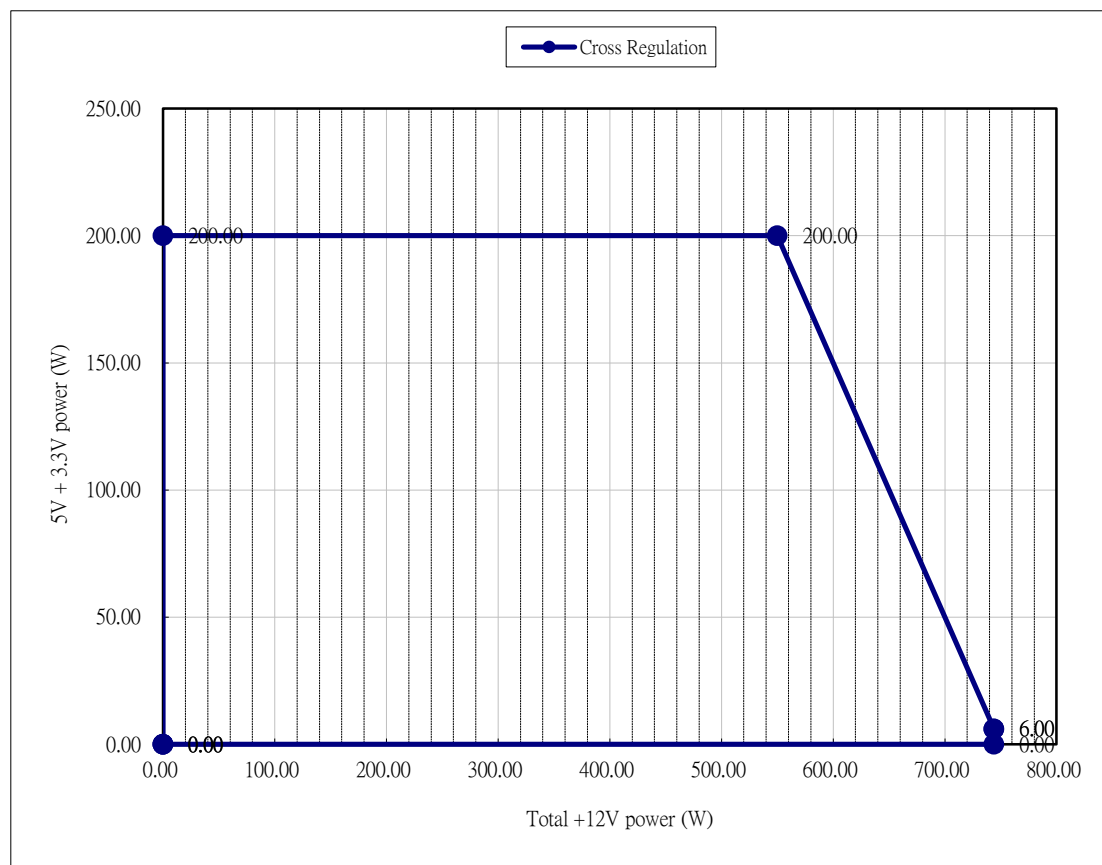


Figure 1

2.2 HOLD-UP TIME: 16ms(minimum)

Test Condition: Full load. AC input 115V or 230V, 47Hz .

2.3 LOAD TRANSIENT RESPONSE (STEP LOAD)

Step load changes up to 60%(12V) and 30%(3.3V and 5V) of full load, while other loads remains constant within the rating. The load waveform shall be a square wave with the slope of the rise and fall at 1.0A/usec and the frequency shall be from 50Hz to 10kHz. The DC output voltage will stay within regulation of $\pm 5\%$ during the step load changes.


2.4 OVERSHOOT

Overshoot at turn on or turn off shall be less than 10% of the nominal output voltage.

2.5 TIMING, HOUSEKEEPING AND CONTROL

A low active PS-ON (DC ON/OFF) input signal is equipped, which provide the interface **ENABLE** or to **DISABLE** the **GROUP1** of DC output. This signal is electrically to interface with **TTL, OPEN COLLECTOR** and the **HARD SWITCH**.

| | | | |
|---|---|--|---------------------|
|  SWITCHING POWER SUPPLY | PRODUCT SPECIFICATION | | File: SSP-750RS-A10 |
| | Model: SSP-750RS Full Range Rev.:A10 | | Date: Jan, 25, 2019 |
| | | | Page: 4 of 7 |

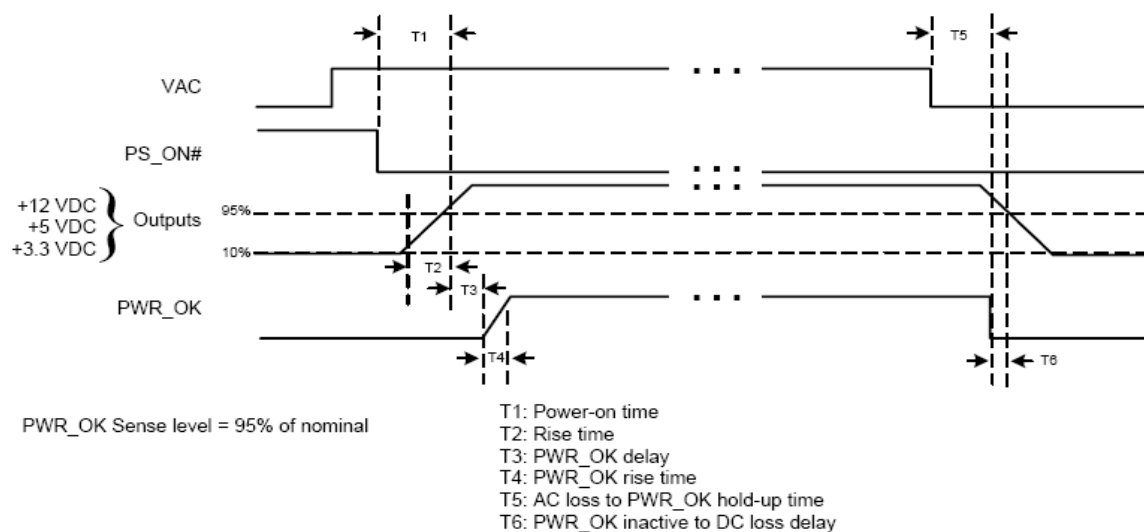

| SIGNAL NAME | | MAXIMUM | MINIMUM |
|-------------|----------------------------------|---------|---------|
| T1 | PS_Power-on time | 500mS | |
| T2 | Rise time from each main output | 20mS | 0.2mS |
| T3 | PWR_ok delay | 500mS | 100mS |
| T4 | PWR_ok rise time | 10mS | |
| T5 | AC loss to PWR_OK hold-up time | | 16mS |
| T6 | PWR_OK inactive to DC loss delay | | 1mS |

2.5.1 POWER GOOD SIGNAL:

Signal Type: open collector +5DC, TTL compatible.

Logic Level: <0.4V while sinking 4 mA.

Logic Level High: between 2.4VDC and +5V output while sourcing 200 uA.

Max Ripple/Noise: 400mV pk-pk. (no capacitor test)

3.0 OUTPUT PROTECTION

3.1 TOTAL POWER PROTECTION: (OPP)

Total power 150% max with shut-down and latch off protection.

3.2 OVER VOLTAGE PROTECTION: (OVP)

| | | | |
|---|---|--|---------------------|
|  SWITCHING POWER SUPPLY | PRODUCT SPECIFICATION | | File: SSP-750RS-A10 |
| | Model: SSP-750RS Full Range Rev.:A10 | | Date: Jan, 25, 2019 |
| | | | Page: 5 of 7 |

| OUTPUT VOLTAGE | MAX. ACT. VOLTAGE | RESULT |
|----------------|-------------------|--|
| +3.3V | 4.3V | Shut down & Latch OFF The Group 1 DC Output |
| +5V | 7.0V | |
| +12V | 15.6V | |
| +5Vsb | 8.0V | |

3.3 SHORT CIRCUIT PROTECTION: (SCP)

The short between any output of group 1 will shut down all group1.

The short at group 2 will Shut down both group 1 and group 2.

3.4 OVER CURRENT PROTECTION: (OCP)

Over current protection was designed to limit the current to operate within safe operating conditions.

+3.3V, +5V and +12V rails latch off protection required with AC line or PS_ON reset. +5Vsb rail auto-restart upon removal of fault condition.

| Rails | Max. protected current |
|-------|------------------------|
| +3.3V | 32A |
| +5V | 56A |
| +12V | 99.2A |
| +5Vsb | 8A |

3.5 NO-LOAD SITUATION

No damage or hazardous condition should occur with all the DC output connectors disconnected from the load.

3.6 RESET AFTER SHUTDOWN

Whenever the power supply latches into shutdown state due to fault condition on its output, the power supply will return to normal operation only after the fault has been removed and the PS_ON# has been pulled low again. If the power supply latches into shutdown state due to fault condition on 5Vsb, the power supply will return to normal operation only after the fault has been removed and the power switch(power cord) has been cycled off/on(plugged out/in) with A MINIMUM OFF TIME OF 3 SECONDS.

| | | | |
|---|---|--|---------------------|
|  SWITCHING POWER SUPPLY | PRODUCT SPECIFICATION | | File: SSP-750RS-A10 |
| | Model: SSP-750RS Full Range Rev.:A10 | | Date: Jan, 25, 2019 |
| | | | Page: 6 of 7 |

4.0 COOLING OF POWER SUPPLY

A DC fan was equipped to cooling the power supply, the fan will blow air into power supply and exhaust through the vent holes in AC receptacle side. **This fan is only for power supply internal cooling purpose, not for system cooling.**


Fan parameters:

| | |
|---------------|----------------|
| Rated Voltage | 12VDC |
| Dimension | 80*80*25(mm) |
| Air flow | 57.28 CFM min. |
| Noise | 42.1 db(A) |

5.0 ENVIRONMENT

5.1 OPERATING

AMBIENT OPERATION TEMPERATURE: 0 to 50 °C. (The rated power will de-rate from 100% to 60% from 50°C to 70 °C as below curve)

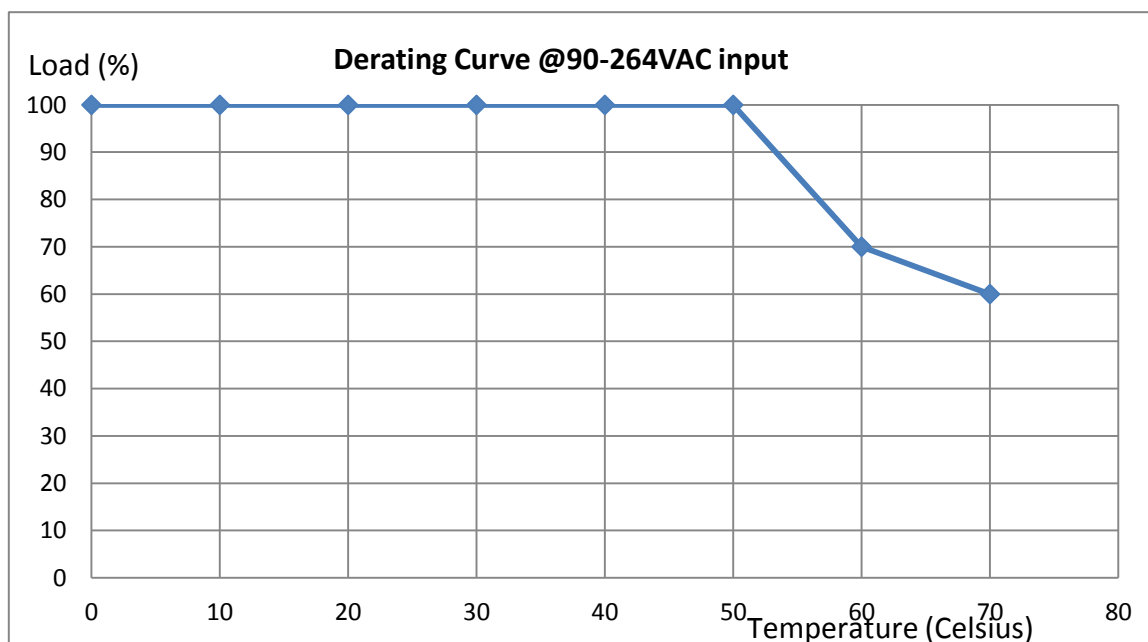

AMBIENT OPERATION RELATIVE HUMIDITY: To 85% relative humidity (non-condensing)

5.2 SHIPPING / STORAGE

AMBIENT STORAGE TEMPERATURE:-40 to 85 Deg C

AMBIENT STORAGE RELATIVE HUMIDITY: To 95% relative humidity (non-condensing)

| | | | |
|---|---|--|---------------------|
|  SWITCHING POWER SUPPLY | PRODUCT SPECIFICATION | | File: SSP-750RS-A10 |
| | Model: SSP-750RS Full Range Rev.:A10 | | Date: Jan, 25, 2019 |
| | | | Page: 7 of 7 |

6.0 MTBF

Over 100,000 hours at 25 Deg C. excluding the DC Fan.

7.0 EMC

CE Class B

FCC Class B

8.0 SAFETY

cTUVus

TUV

CB

CCC

BSMI

RCM

9.0 MECHANICAL

Dimension: L 160mm x W 150mm x H 86mm, +/-1mm.